




Hup 40-30

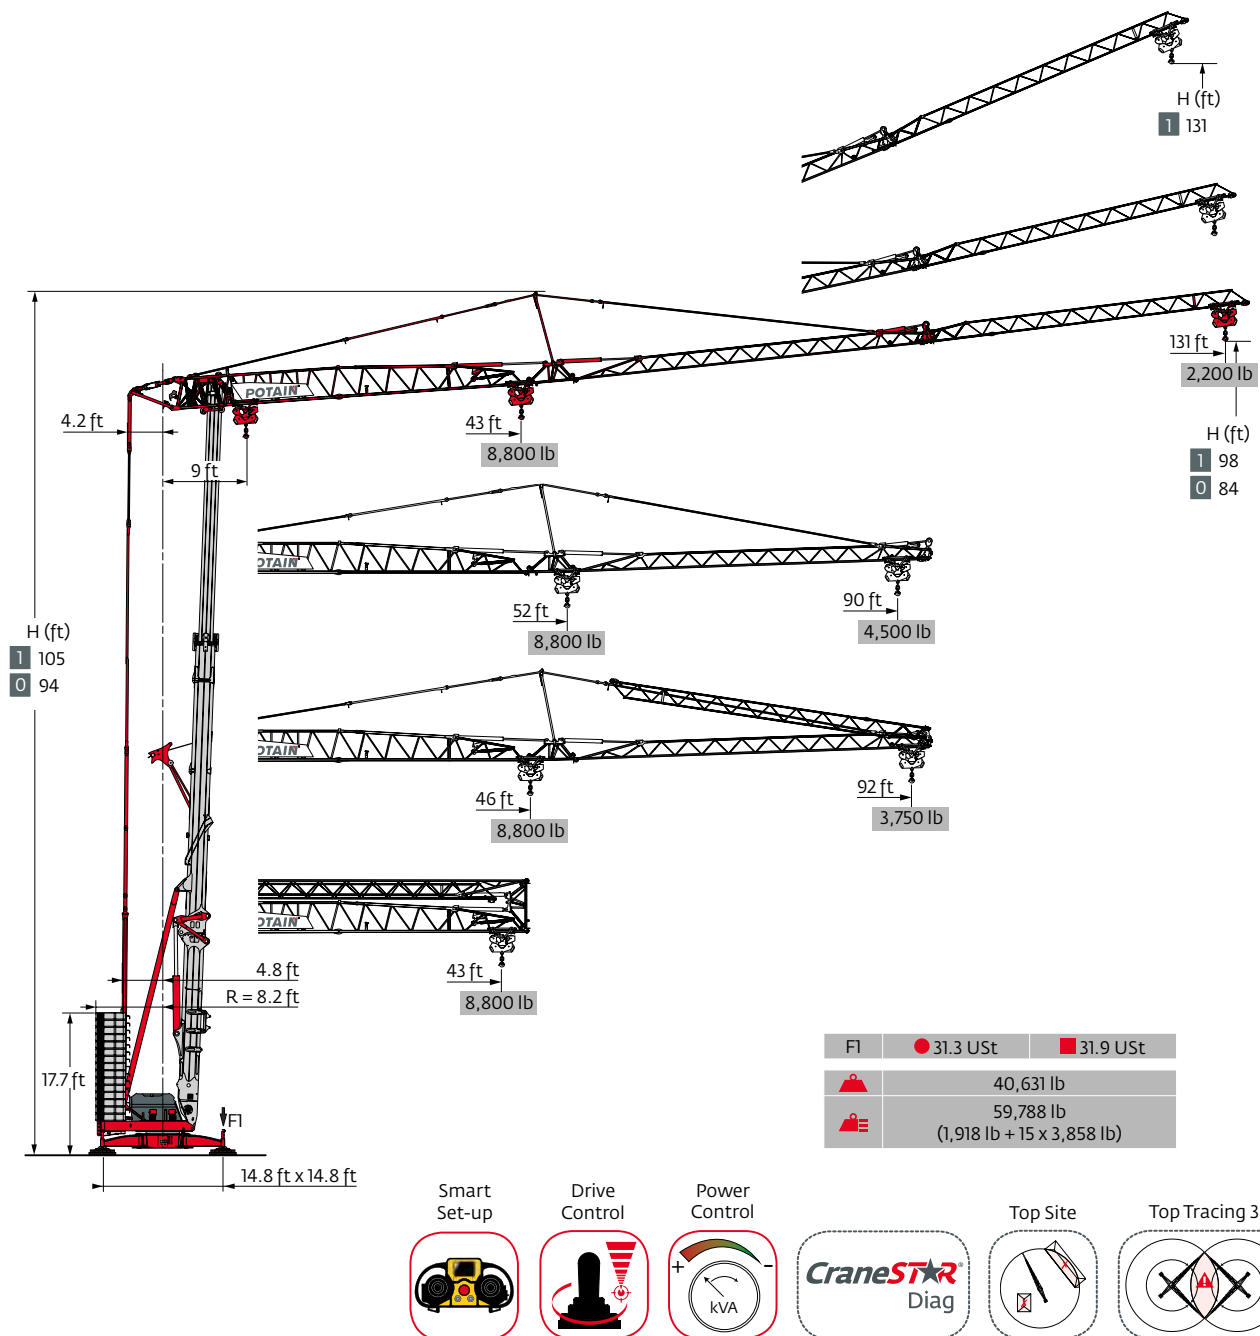


Load curves

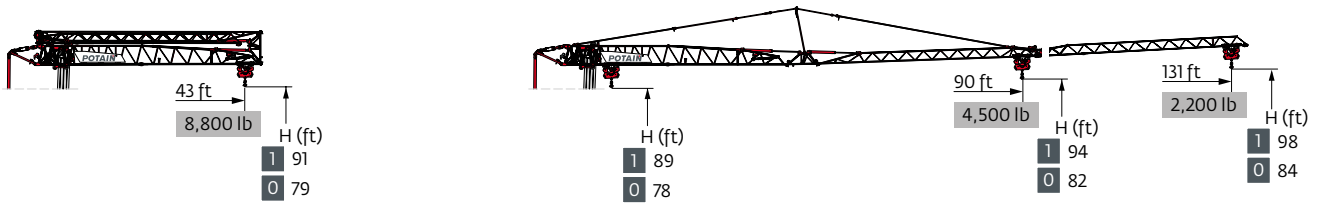

131 ft	9 ▶ 43 ft	9 ▶ 43 46 49 52 56 59 62 66 72 82 89 98 105 115 121 131 ft
	 8,800 lb	8,800 8,200 7,500 6,950 6,450 6,000 5,650 5,300 4,700 4,000 3,650 3,200 2,950 2,650 2,450 2,200 lb
90 ft	9 ▶ 43 ft	9 ▶ 52 56 59 62 66 72 82 90 ft
	 8,800 lb	8,800 8,050 7,500 7,000 6,600 5,900 5,050 4,500 lb

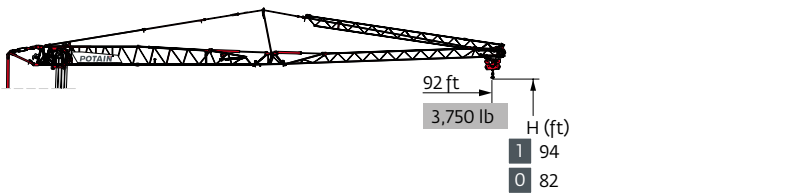


131 ft	9	46	49	52	56	59	62	66	72	82	89	92	ft
▲▲▲▲	▲	8,800	8,050	7,450	6,900	6,450	6,050	5,650	5,050	4,300	3,900	3,750	lb

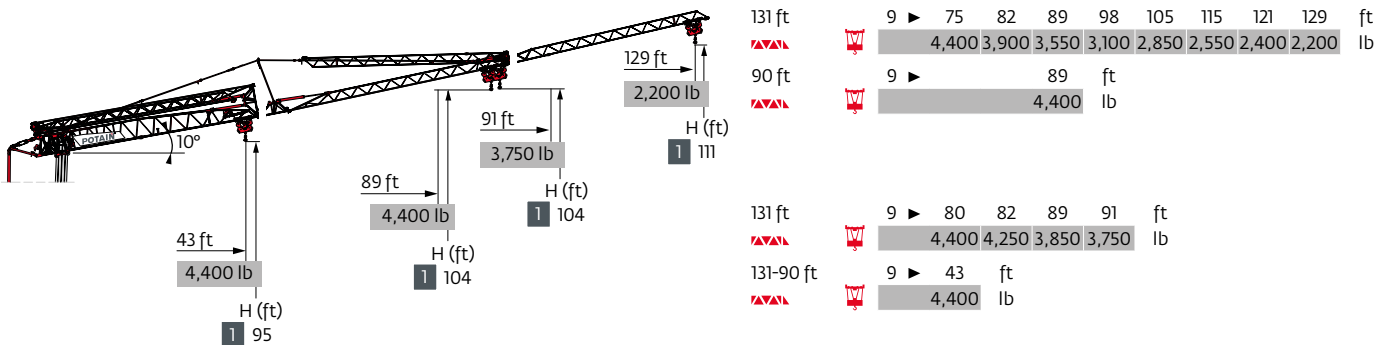

131 ft	9	75	82	89	98	105	115	121	129	ft
▲▲▲▲	▲	4,400	3,900	3,550	3,100	2,850	2,550	2,400	2,200	lb
90 ft	9			89						
▲▲▲▲	▲			4,400						

131 ft	9	80	82	89	91	ft
▲▲▲▲	▲	4,400	4,250	3,850	3,750	lb
131-90 ft	9	43	ft			
▲▲▲▲	▲	4,400	lb			

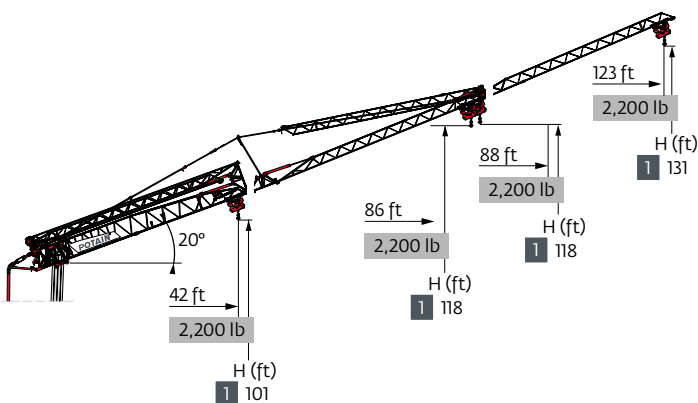


Mechanisms


480 V - 60 Hz								hp	kW
	18 HPL 10	fpm	6	62	118	190	213	18	13
		lb	8,800	8,800	4,400	2,200	1,100		
	3 DVF 5	fpm	3 → 148 (0 → 2,200 lb) 3 → 135 (2,200 lb → 8,800 lb)					3	2.2
	HPS 142	rpm	0 → 0.9					2 x 5	2 x 3.7

 IEC 60204-32	
480 V (+6% -10%) 60 Hz	23 → 17 kVA
	


Erection

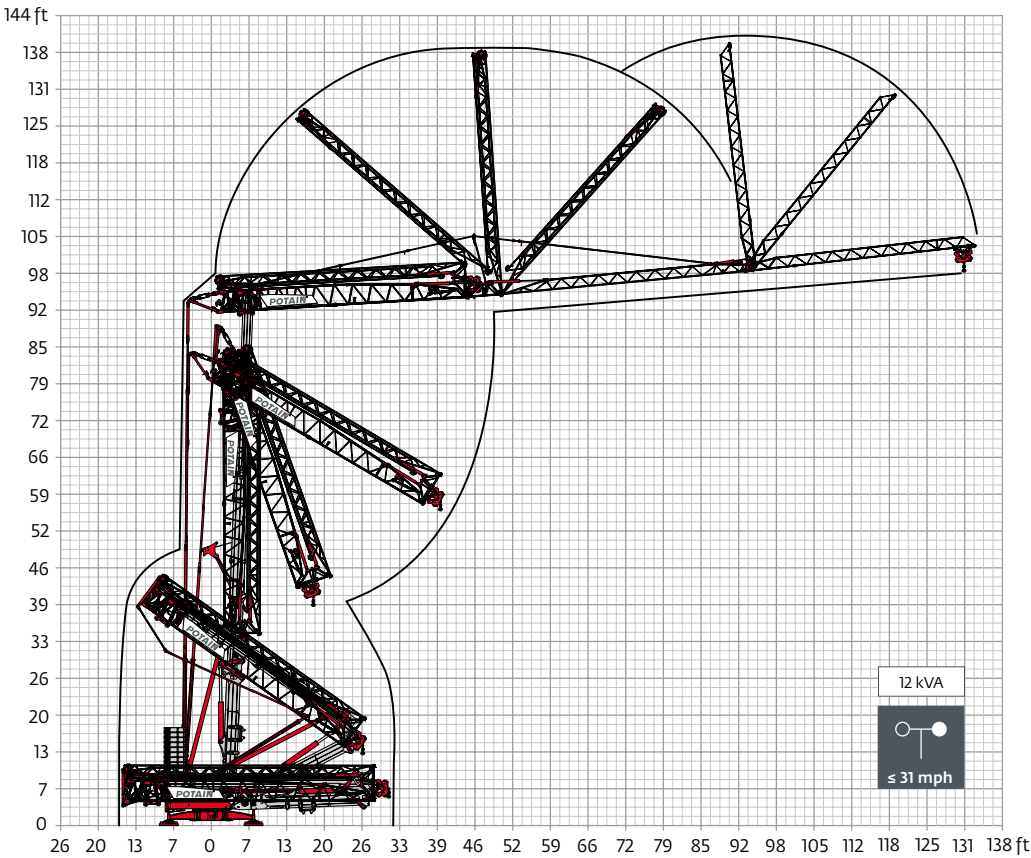


Transport

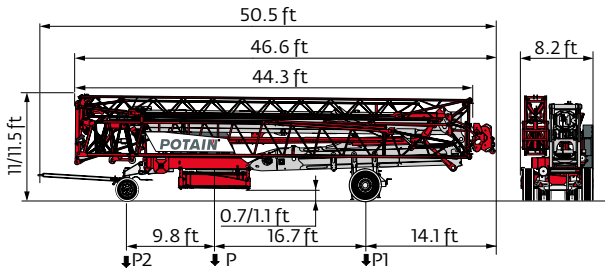


	mph	P (lb)	P1 (lb)	P2 (lb)
DJ100/S120	6	44,798	26,169	18,629
DJ105/S125	15.5	45,371	26,411	18,960

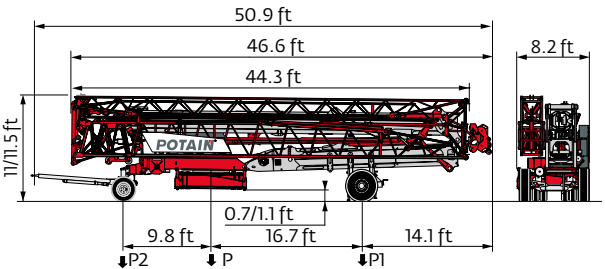

	mph	P (lb)	P1 (lb)	P2 (lb)
DJ126M/S125	15.5	45,812	26,455	19,357
..... /..... ⓘ				

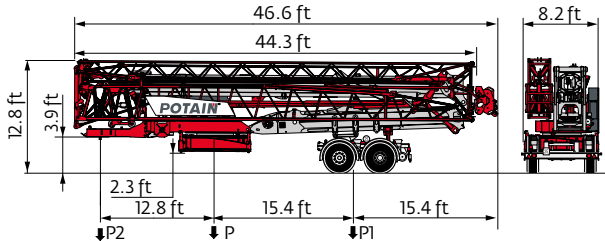

	mph	P (lb)	P1 (lb)	P2 (lb)
SL121/S215M	15.5	48,237	32,430	15,807

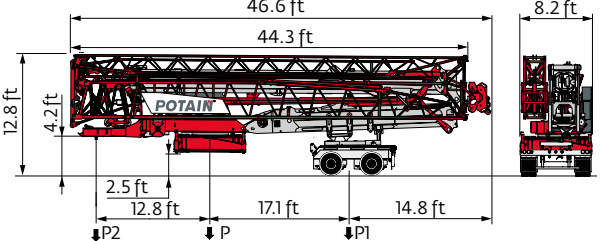

	P (lb)	P1 (lb)	P2 (lb)
North America Highway Axle	47,961	32,132	15,829

- R

Rear slewing radius
- ⓘ

Consult us
- Reactions in service
- Reactions out of service
- ⚖

Weight without load, without ballast, without transport axles, with max. jib and standard height
- ⚖

Total ballast weight
- Standard equipment
- ⬜

Options
- ⬜

Hoisting
- ⬜

Trolleying
- ⬜

Slewing
- ⚡

Required power

⌚ Power Control Function: winch speeds adapted to the available power

⚠ This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

